


Supercharger Bypass Vacuum Actuator

| |
|--------------------------|
| General Equipment |
| Actuator Adjustment Tool |

Removal

1. Remove the SC. Refer to Section 303-12.
- 2.

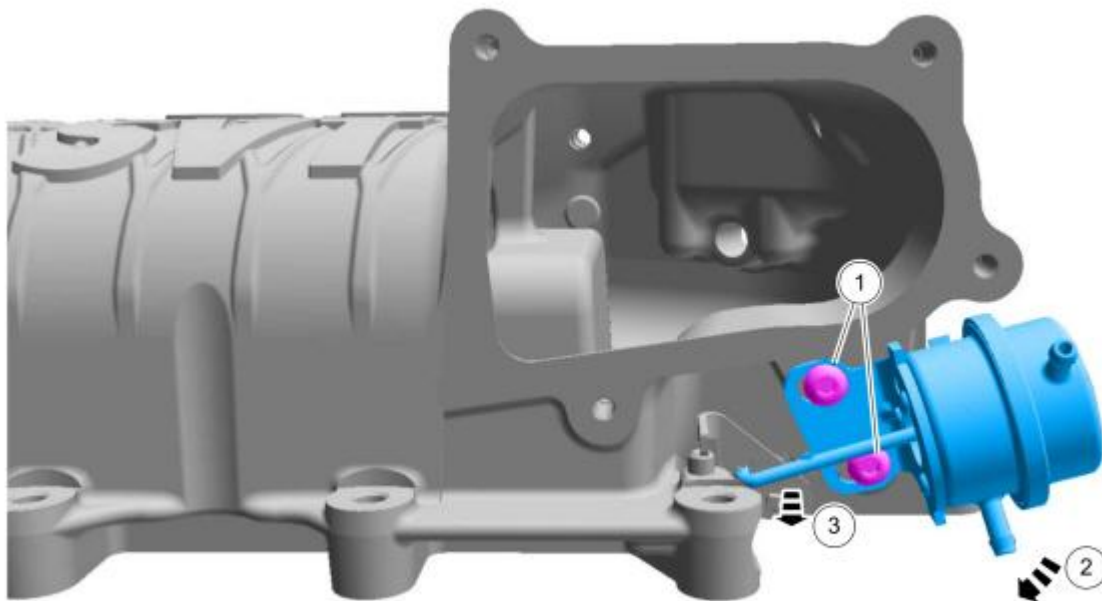


N0143435

Installation


1. **NOTICE:** The actuator adjustment tool included with the new actuator kit must be used when installing the Supercharger (SC) bypass vacuum actuator. Failure to correctly adjust the actuator will result in incorrect operation of the SC assembly.

General Equipment: Actuator Adjustment Tool.

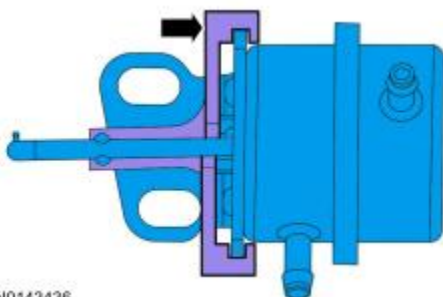


N0143436

2.
 - 1.
 - 2.
 3. Tighten to 20 Nm (177 lb-in).

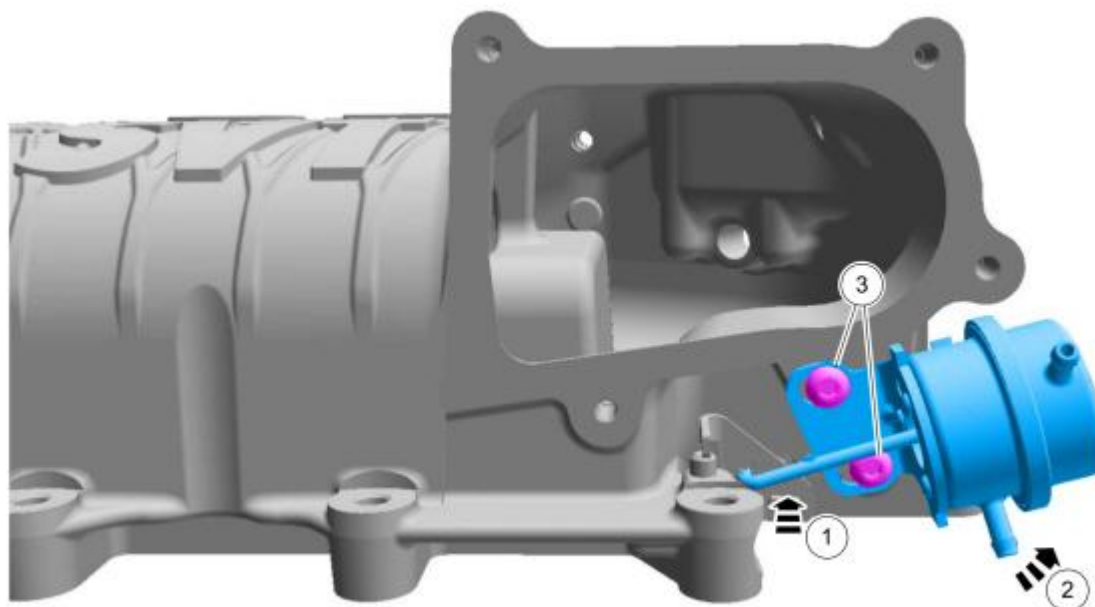

N0143437

3. Remove General Equipment: Actuator Adjustment Tool.

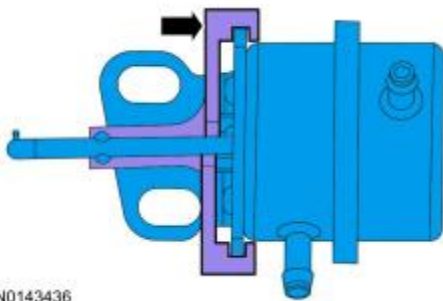

N0143436

4. Install the SC. Refer to Section 303-12.
-